


产品数据对照表 (HID镇流器系列 单位:mm)


菲型

型号	A	B	C	D	E	F	G	备注(气隙)
60F	60	41.6	20	10	10	31.6	10	0.7 0.8 0.9 1.0
75F	75	51.6	25	12.5	12.5	39.6	12.5	1.2 1.4 1.6 1.8 2.0 2.4
96F	96	64	32	16	16	48	16	1.6 2.2 2.6 4.0
78F	78	53.35	25	12.5	14	41	12.5	1.6 2.0 2.4
120F	120	80	40	20	20	60	20	3.0
								以上都是高速模具

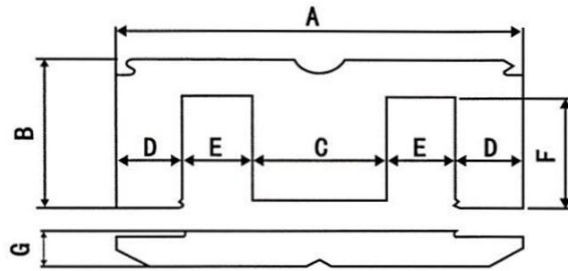

亚型

型号	A	B	C	D	E	F	G	
60H	60	40	20	10	10	30	10	0.8 1.0
66H	66	44	22	11	11	33	11	0.9 1.0 1.2 1.8
84H	84	56	28	14	14	42	14	1.8 2.0
75H	75	50	25	12.5	12.5	37.5	12.5	1.2 1.4 1.6 1.8 2.2
96H	96	64	32	16	16	48	16	1.6 2.2
150H	150	100	50	25	25	75	25	7.2
112H	112	76	36	18	18	56	18	2.8
								以上都是高速模具

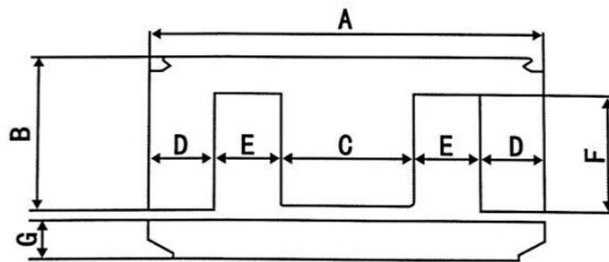

注意毛刺不超过0.02MM, 尺寸公差±0.02MM, 检查正反面的平整度, 检查气隙。